


TTI TWINJET[®]

AIR INDUCTION TWIN FLAT SPRAY TIPS

The TTI60 TeeJet air induction twin flat spray tip provides extremely large droplets for maximum drift control along with the improved coverage of a twin spray. The single piece tip & cap design allows for fast, easy installation and, unlike some other twin sprays, has a very compact size. The TTI60 is ideal for the application of systemic, post-emerge herbicides.

FEATURES:

- TTI60 produces two 110° wide angle, flat spray patterns for uniform coverage in broadcast applications.
- 60° angle between leading and trailing patterns for increased canopy penetration and leaf coverage.
- All in one molded nozzle and Quick TeeJet[®] cap design provides automatic spray alignment.
- Extremely large drift resistant droplets are produced through the use of a venturi air aspirator.
- Provides excellent drift control and produces minimal driftable fines - less than 1.5%*.
- Acetal construction for excellent chemical and wear resistance.
- Removable pre-orifice allows for disassembly and cleaning.
- Suggested spray pressure range of 20-100 PSI (1.5-7 bar).

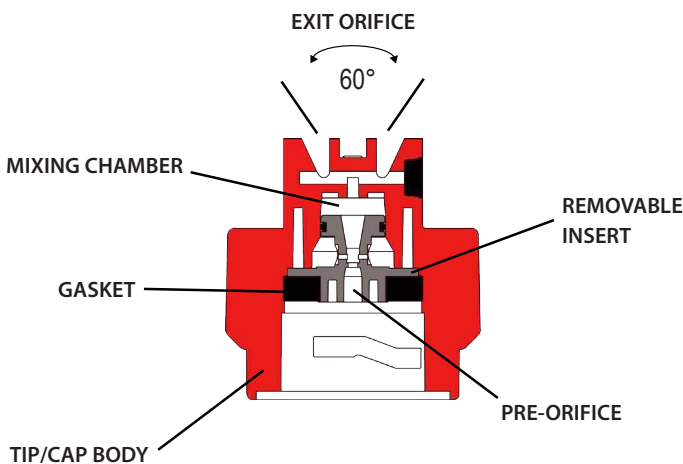

TTI60 CROSS-SECTIONAL VIEW

TTI60 SPRAY TIP



DROPLET SIZE AND COVERAGE



TURBO TEEJET[®] (TT)
(M Droplets)



TTI TWINJET[®] (TTI60)
(XC Droplets)

SELECTION GUIDE

CONTACT PRODUCT	SYSTEMIC PRODUCT	DRIFT MANAGEMENT
N/A	EXCELLENT	EXCELLENT

* -04 capacity spraying water at 40 PSI (2.8 bar). Driftable fines defined as droplets smaller than 150 microns.

